

Unisorb® Hollow Base Mounting Kits

BP Mounting Kit



Designed for the hollow bases of mills, lathes, grinders and other machines. Provides vibration control, leveling and support.

Accurate leveling is obtained by simply turning the leveling screw. Free-floating action of the leveling screw automatically compensates for uneven or pitched floors. Once adjusted, the lock washer and nut hold the adjustment secure. Furnished complete with Elasto-meric pads, BP-2500 and BP-5000 Series Level-Rite® Mounts absorb vibration, reduce noise and prevent machines from creeping or walking. Properly installed, Level-Rite Mounts meet OSHA standards for anchoring machinery.

Patented molded elastomeric vibration isolation pads

- Full 1-3/8" ADJUSTMENT RANGE provides accurate leveling & coolant flow on worst case floor conditions.
- Includes (2) adapter plates to span width of base.
- Mounts elevate machine base for cleaning and maintenance.

BP-2500 LEVEL-RITE® HOUSING DIMENSIONS


LENGTH	WIDTH	HEIGHT w/ PLATE (H) - min. / max.
5.50" (140mm)	3.5" (89mm)	2.88" / 4.26" (73mm / 108mm)

BP-5000 / 5000S LEVEL-RITE® HOUSING DIMENSIONS


LENGTH	WIDTH	HEIGHT w/ PLATE (H) - (min. / max.)
7.00" (178mm)	4.5" (114mm)	2.88" / 4.26" (73mm / 108mm)

Kit includes mounts with special length leveling screws and adapter plates. Standard kits accommodate these CENTER HOLE DISTANCES*:


BP-2500 Adapter Plate 19.25" - 20.75" (489mm - 527mm)

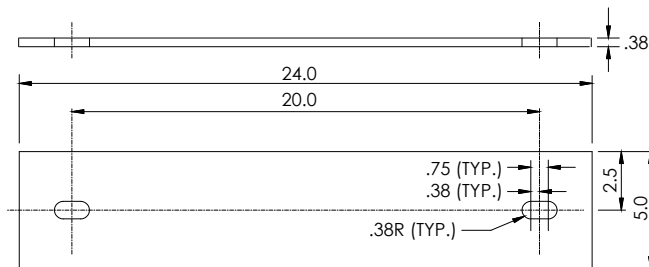


BP-5000 ADAPTER PLATE 23.25" - 24.75" (591mm - 629mm)

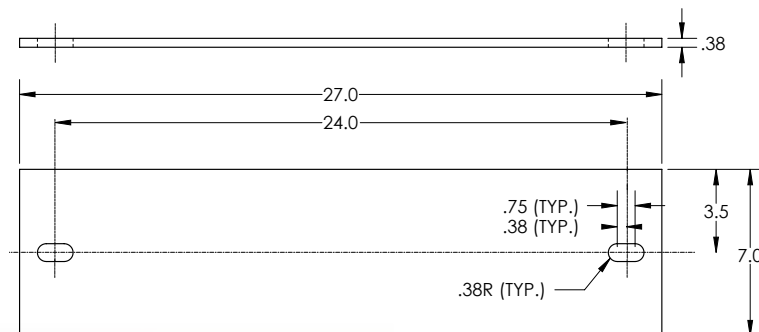

BP-5000S ADAPTER PLATE 25.25" - 26.75" (641mm - 679mm)

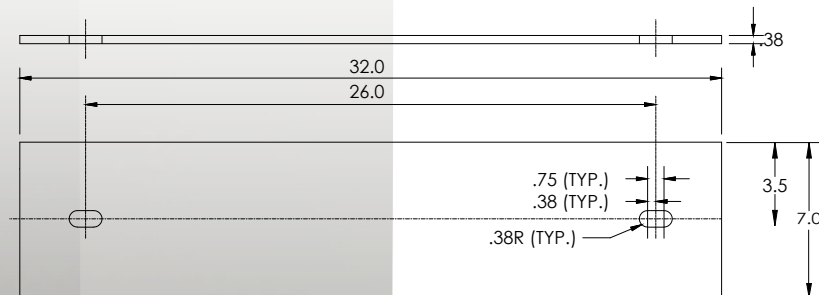

* Custom hole locations for adapter plates available upon request.

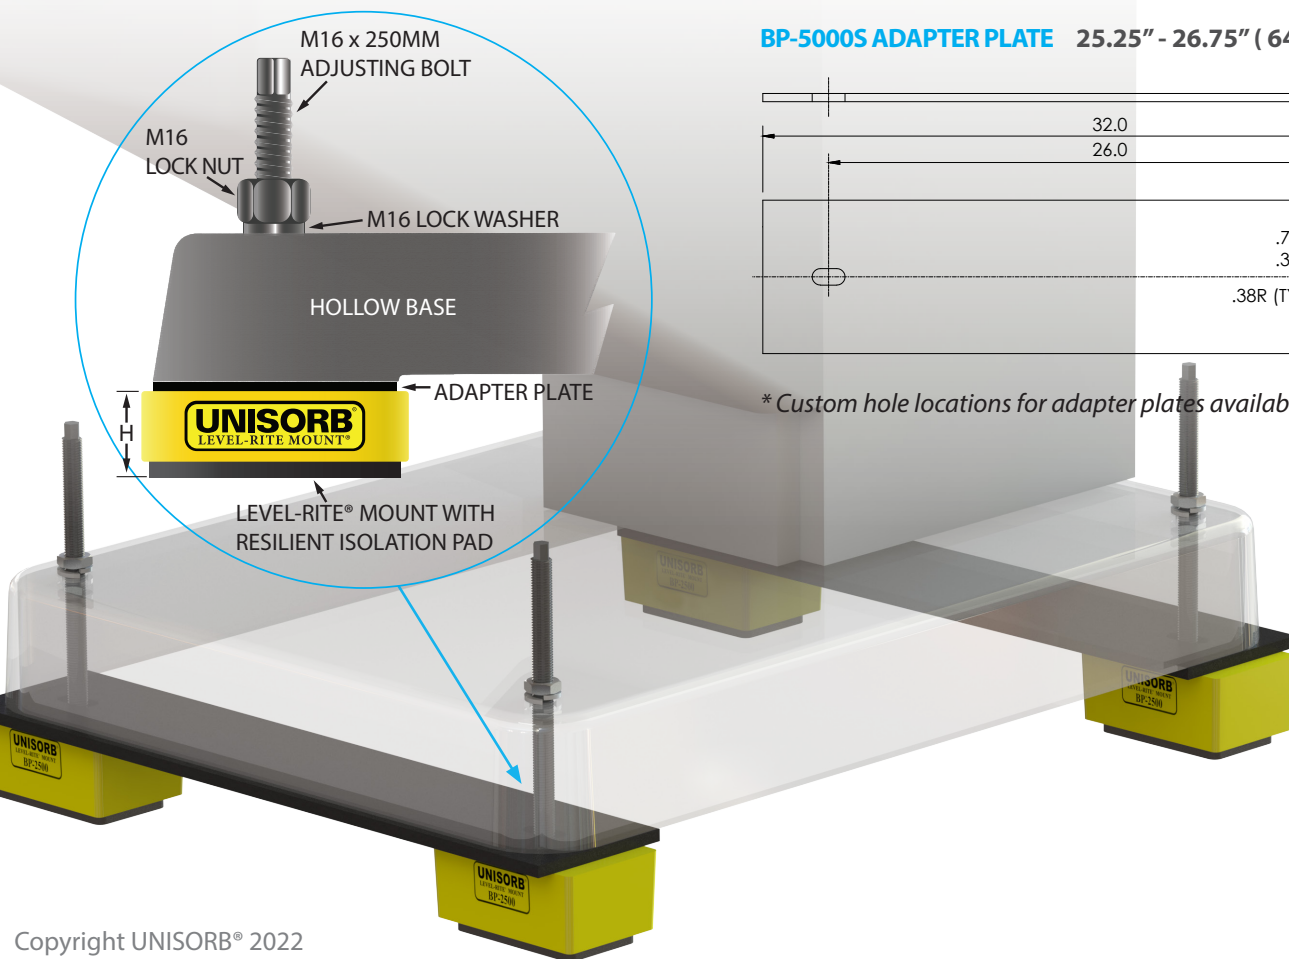

Scan QR Code For



Full Product Data

www.unisorb.com

888-486-4767 • 517-764-6060

ISO-9001 Certified